

LP3

ULTRA-THIN

3 LED PERIMETER WARNING LIGHTHEAD



FEATURES

- Sleek, low-profile design eases installation in tight spaces, while also improving aesthetics in typical surface mount applications
- SAE Class 1 certified
- Multi-unit synchronization in simultaneous or alternating flash modes
- Non-volatile memory recalls last flash pattern used at power up
- Aluminum base for heat dissipation
- UV infused polycarbonate lens provides ultimate resistance to cracking / discoloration
- Optional adhesive mounting pad included with each unit
- Weatherproof & vibration resistant
- LEDs rated to 100,000+ hours of operation
- Reverse polarity protection
- 5 year, no-hassle warranty

SPECIFICATIONS

- Flash Patterns: 12
- Input Voltage: 12~24 Vdc
- Current Draw: 0.27A @ 12Vdc - 0.14A @ 24Vdc
- Sync: 15+ Units
- LED Count: 3
- Dimensions: 3.45" L X 1.18" H X 0.26" D
- Certificates: SAE J595 Class 1; CA Title 13, ECE R10, IPX8
- Colors: Amber, White


PART NUMBER

LP3-x: Replace "x" with the first letter of desired color

APPROVALS



DIMENSIONS

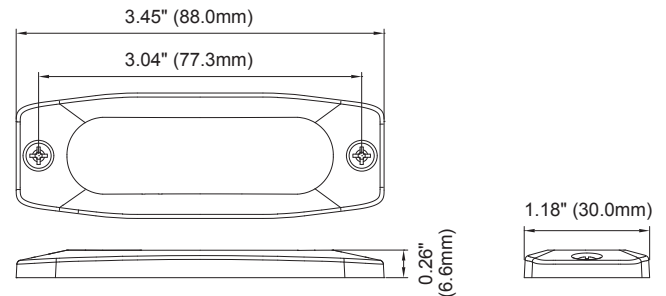

Side View



FLASH PATTERNS

1	Random	11	Single H/L
2	Steady	12	Single - Triple - Quint
3	Single [SAE] [CA13]		
4	Mega		
5	Double [SAE]		
6	Triple [SAE]		
7	Quad [SAE]		
8	Quint [SAE]		
9	Octa Flash [SAE]		
10	Single - Quad		