


ST6

SUPER-THIN

6 LED PERIMETER WARNING LIGHTHEAD

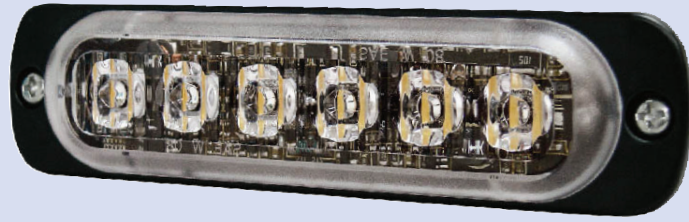

FEATURES

- Sleek, low-profile design eases installation in tight spaces, while also improving aesthetics in typical surface mount applications
- Multi-unit synchronization in simultaneous or alternating flash modes
- Non-volatile memory recalls last flash pattern used at power up
- Aluminum base for heat dissipation
- UV stabilized polycarbonate lens: Stabilizer is injected into PC during manufacturing, resulting in superior resistance to environmental effects. (yellowing, cracking, etc.)
- Multiple mounting bracket options available
- Black bezel included. White and chrome sold separately
- Weatherproof & vibration resistant
- LEDs rated to 100,000+ hours of operation
- Reverse polarity protection
- 5 year, no-hassle warranty

SPECIFICATIONS

- Flash Patterns: 19
- Input Voltage: 12~24 Vdc
- Current Draw: 0.5A @ 12Vdc - 0.25A @ 24Vdc
- Sync: 15+ Units
- LED Count: 6
- Dimensions: 4.4" L X 1.1" H X 0.35" D
- Certificates: SAE J595 Class 1; CA Title 13, ECE R10-04
- Colors: Amber, Blue, Red, White & most split-color combinations

PART NUMBER


ST6-xx: Replace "xx" with the first letter of the color(s)

APPROVALS



Available with vertical optics, producing 30% more light spread when mounted vertically.

DIMENSIONS

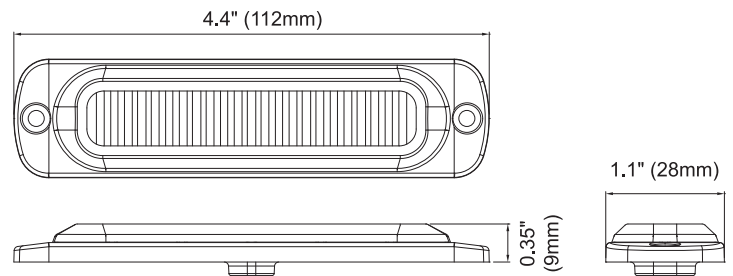

BEZELS



ST6-FCB
Chrome Bezel
(sold separately)



ST6-FBB
Black Bezel
(included with each unit)



ST6-FWB
White Bezel
(sold separately)

FLASH PATTERNS

1	Random	11	Double (all)
2	Single (split)	12	Quad (all)
3	Double (split)	13	Quint (all)
4	Quad (split)	14	Mega (all)
5	Quint (split)	15	Ultra (all)
6	Mega (split)	16	Single-Quad (all)
7	Ultra (split)	17	Single H/L Single-Quad (all)
8	Single-Quad (split)	18	Steady (half)
9	Single H/L (split)	19	Steady (half)
10	Single (all)		

*Split=Left alternate Right *all=all LEDs on